

Eagle EPDM Suction

Heavy Duty Suction / Discharge Hose


- Application:**
- Liquid waste suction, septic handling
 - Cesspool cleaning, slurries/sludge handling
 - Chemicals, dry material, grain transfer
 - Mining and marine use

Tube: EPDM blend rubber

Reinforcement: Plastic helix

Temperature: -40°F to +140°F

Couplings: Contact JGB for proper fitting recommendation and coupling procedure.

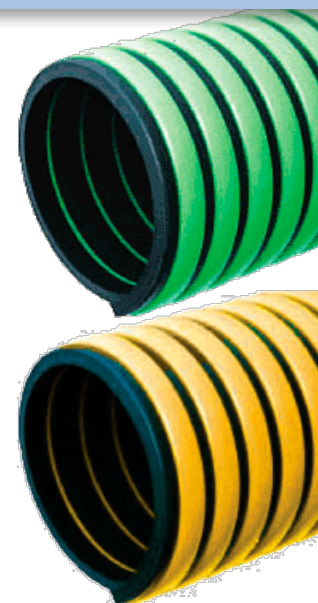

Features:

- Specially compounded rubber wall, exposed plastic helix
- Excellent resistance to chemicals
- Lightweight and flexible
- Smooth bore, exposed helix - easy to drag

Part #		ID	OD	WP	Vacuum Rating	Min. Bend Radius	Weight	Std. Length
Green	Yellow	in	in	psi	in/HG	in	lbs/ft	ft
004-0169-0050I	004-0163-0050I	1	1.34	50	29	1.9	0.23	100
004-0209-0050I	004-0203-0050I	1-1/4	1.65	50	29	3.2	0.34	100
004-0209-0050I	004-0243-0050I	1-1/2	1.85	50	29	3.5	0.41	100
004-0329-0050I	004-0323-0050I	2	2.43	50	29	5.5	0.67	100
004-0489-0045I	004-0483-0045I	3	3.52	45	29	7.5	1.10	100
004-0649-0040I	004-0643-0040I	4	4.6	38	29	11.5	1.84	100
004-0969-0030I	004-0963-0030I	6	6.81	23	28	20	3.23	100



Liverpool Location ISO 9001:2015 Certified QMS by Intertek

Download the JGB® Mobile App



Click for directions:

JGB® Headquarters
Liverpool, NY 13088
(315) 451-2770

Buffalo Branch
Cheektowaga, NY 14225
(716) 684-8224

Southeast Hub
Charlotte, NC 28273
(704) 588-9920

St. Louis Branch
St. Louis, MO 63111
(314) 256-0833

Williston Branch
Williston, ND 58801
(701) 774-2195

Houston Branch
Pasadena, TX 77503
(281) 930-7777

Connect with us:



www.jgbhose.com